


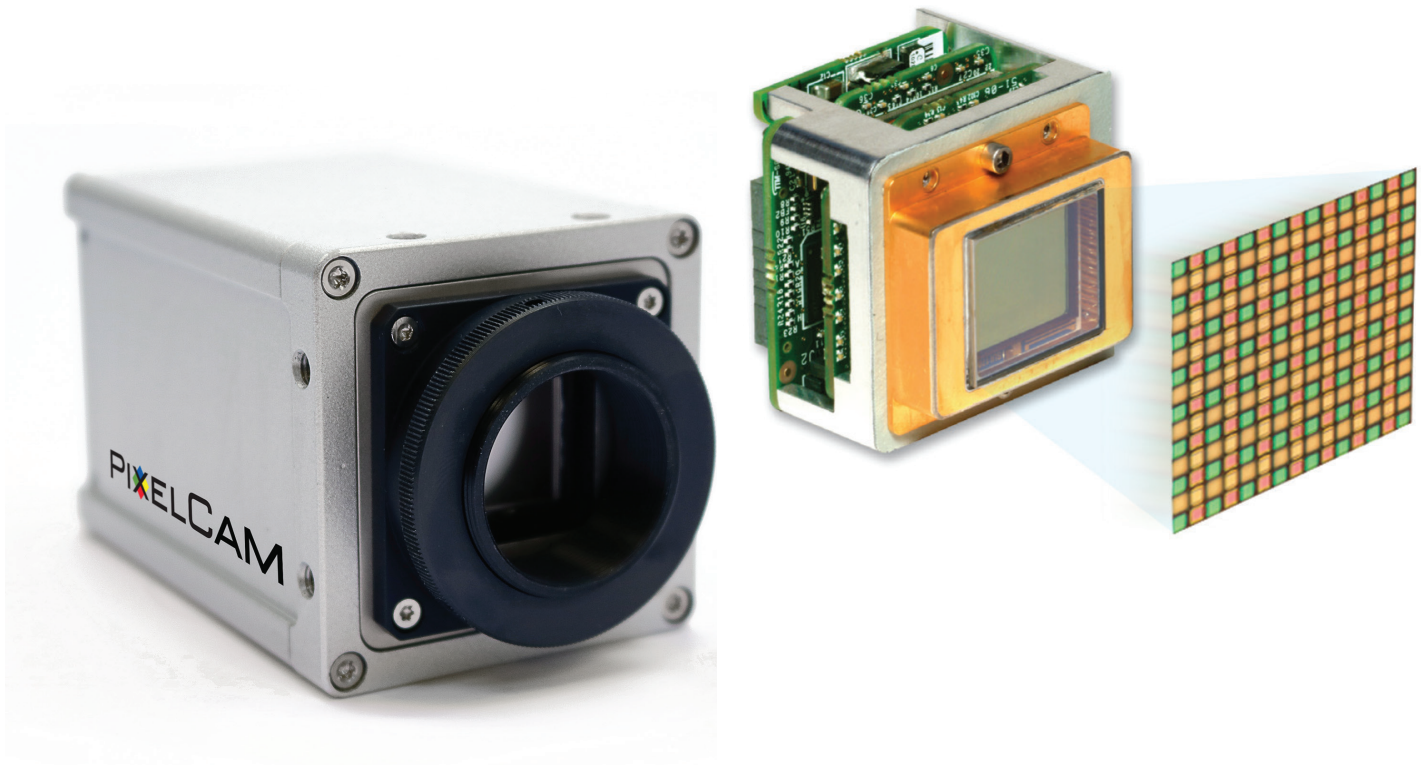

PixelCam™

OEM Multispectral Cameras

Snapshot Multispectral Imaging

PixelCam™ multispectral cameras provide live imaging of 3-9 spectral bands, off-the-shelf or custom, at video rates. Simultaneous multi-channel “snapshot” acquisition delivers rich, real-time data without scene change or pixel shift. Custom dichroic filter arrays are integrated into the focal plane array at wafer-level to create robust linear and area sensors that extract high-contrast spectral information at specific visible and infrared wavelengths. This breakthrough technology enables easy integration into handheld, mobile and aerial cameras – all with the same frame rate, size, weight and power consumption as monochrome cameras.



info@salvotechnologies.com · sales@salvotechnologies.com

US +1 888 - 725 - 8605

10781 75th St N

+1 727 - 544 - 3736

Largo, FL 33777

www.salvotechnologies.com · www.salvocoatings.com

Summary

	VIS+NIR	NIR+SWIR
Spectral response	400-1000 nm	700-1700 nm
Resolution	4 MP: 2048 x 2048 px 16 MP: 4864 x 3232 px	640 x 512 px
Sensor	Si interline CCD 7.4 µm pixel pitch	InGaAs 25 µm pixel pitch
Spectral bands <i>*Custom spectral bands & mosaics available on request</i>	*6-band: RGB + 3xNIR (740/60 nm, 840/60 nm, 940/60 nm) *9-band: VIS + NIR (410, 450, 530, 575, 610, 650, 720, 790, 850 nm)	*4-band: 900/400 nm, 1200/100 nm, 1400/100 nm, 1650/100 nm
Active area	4 MP: 15.15 mm (H) x 15.15 mm (V), 21.43 mm (diagonal) 16 MP: 36.0 mm (H) x 23.9 mm (V), 43.2 mm (diagonal)	16.0 mm (H) x 12.8 mm (V), 20.5 mm (diagonal)
Frame rate overlocked	4 MP: 15 fps at full resolution 16 MP: 16 fps at full resolution	30 fps
Optical interface	4 MP: C mount 16 MP: F mount	Ni-42
Digital output	4 MP: GigE Vision® 16 MP: Camera Link®	Camera Link®, 14 bit
Dimensions (no lens or mount)	4 MP: 52.5 mm (H) x 52.5 mm (W) x 79.4 mm (D) 16 MP: 91 mm (H) x 91 mm (W) x 104 mm (D)	52.1 mm (H) x 52.1 mm (W) x 64.7 mm (D) 2.1" (H) x 2.1" (W) x 2.6" (D)
Weight	4 MP: 377 g 16 MP: 414 g	235 g (0.52 lb.)

Benefits

- Simultaneous multi-band imaging
- Custom VIS-NIR-SWIR spectral bands
- Portable size, weight and power consumption
- Robust, high reliability, scalable production


OEM Customization

- Application-specific spectral bands
- Custom pixel-scale mosaic patterning
- Sensor, camera and housing options
- Mechanical and environmental requirements
- Proof-of-concept prototypes to high-volume production


Applications

- Aerial mapping
- Biomedical imaging
- Machine vision
- Product screening
- Remote sensing
- Surveillance and authentication
- Unmanned systems


Dichroic Filter Array

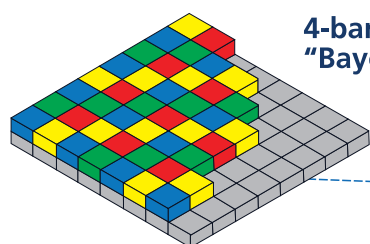

**4-band NIR-SWIR
"Bayer" mosaic**



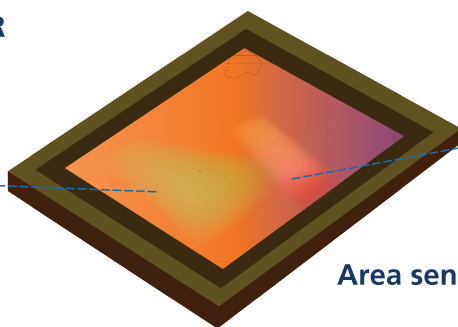


Area sensor



**6-band VIS-NIR
"Bayer" mosaic**

Spectral Response

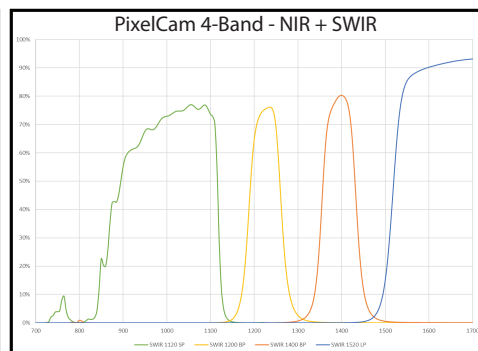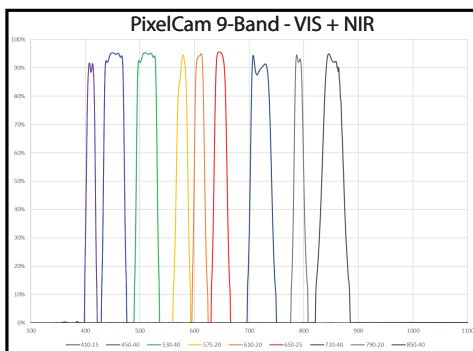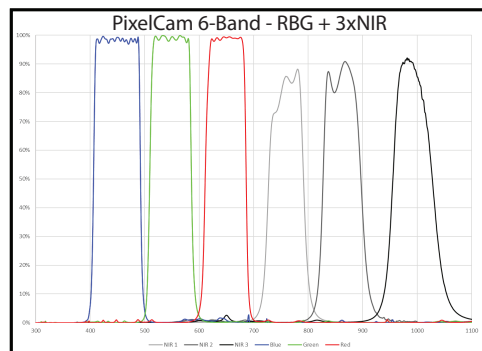

info@salvotechnologies.com · sales@salvotechnologies.com

US +1 888-725-8605

+1 727-544-3736

www.salvotechnologies.com · www.salvocoatings.com

10781 75th St N

Largo, FL 33777

012218